


# PVC, CPVC, TEFLON, & HDPE PERFORATED PIPE

\* center to center  
|-----|

## Non - Staggered Option

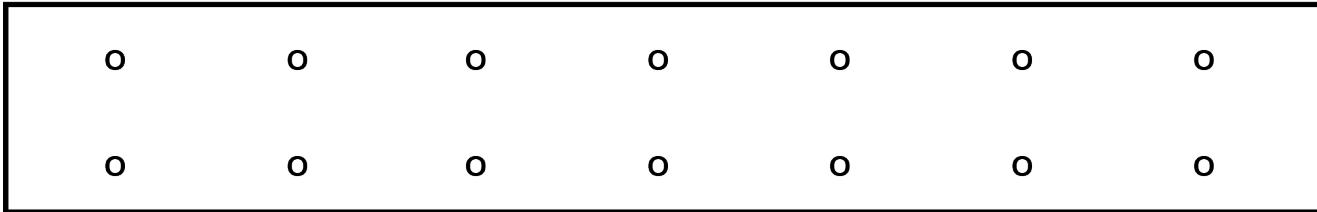

\*\*

\*\*

\* Several options available for Hole Centers: Most common are 3", 4", 5", or 6" on center.

(Other options are available -- contact us)


\*\* Many options as to the number of rows of holes, depending on pipe diameter.

(1 through as many as 12 rows, centered 180, 120, 90, 60, 45, 30 degrees apart (& others).

Depending on Diameter & Schedule/SDR -- Many hole diameters available, starting at 1/8" & larger.

\* center to center  
|-----|

## Staggered Option

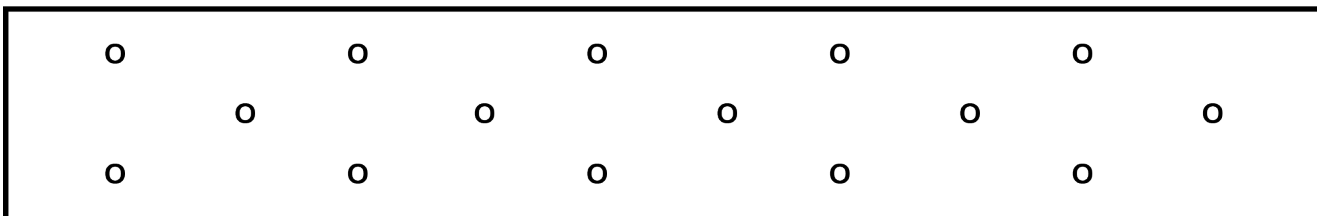

\*\*

\*\*

\*\*

|---|

Stagger

PVC Pipe in Belled End, Plain End, Gasket End, or Flush Threaded Joint.

CPVC Pipe in Belled End, Plain End, or Flush Threaded Joint.

Diameters from 1/2" through 24" in all of the above options. \*\*\*

\*\*\* (Except Flush Joint Maximum Diameter is 16")

Teflon Pipe in Select Diameters & Schedules/SDR Sizes.

HDPE Diameters from 1/2" through 24" -- Straight Lengths only, no coiled pipe.

